

# U.L.C. TANKS

## Utility Steel Tank ULC-5601-07 - Latest Standard

### Designed for the Storage of Petroleum Products

#### The Economical Storage Solution

##### Standard Design Features:


- Aboveground tanks designed and built to meet ULC-5601-07
- Available in single or double wall design
- Flanged heads construction for greater rigidity
- Tank built with A-569, A-1011 or 44W, 1/8" thick steel
- Commercial blast c/w two coats direct-to-steel two part epoxy
- Includes three NPT 2" tank flanges and one N.P.T. 1-1/2" tank flange
- One(1) normal vent fitting as per code
- Lifting Lug(s) included on every tank
- Labeled as per specifications and regulations

Inquire about other available options



"This high-quality product undergoes a series of tests and is built to last. Proud and dedicated workmanship goes into the fabrication of every tank."

##### Specifications:

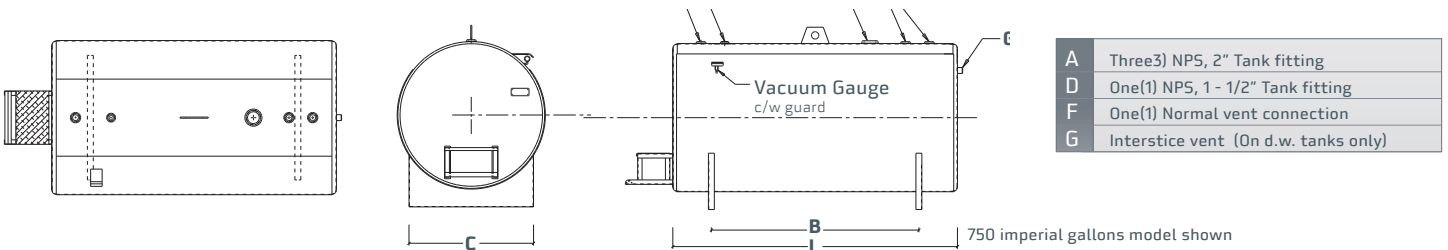

Capacity		Dimensions (in.)				Lifting Lug(s)	Utility Steps	Fittings	Approx. Weight	
Liters	Imp. Gal.	Dia.	L	B	C			N.P.T.	S.W.	D.W.
1 136	250	37.5	60	41.25	33	1	no	Three(3) 2" & one(1) 1-1/2"	345 lbs	820 lbs
1 932	430	50	60	36	42	1	no	(3) 2" & (1) 1-1/2"	500 lbs	960 lbs
2 273	500	50	72	46	42	1	yes	(3) 2" & (1) 1-1/2"	560 lbs	1 090 lbs
3 182	700	50	96	70	42	1	yes	(3) 2" & (1) 1-1/2"	700 lbs	1 350 lbs
4 546	1 000	50	144	119	42	2	yes	(3) 2" & (1) 1-1/2"	970 lbs	1 860 lbs

Inquire for details

##### Distributed by: