

# MOBILE I.B.C. TANKS

## Companion Series CAN/CGSB-43.146-2002 Standard


Designed for the Transportation of Petroleum Products

### For Road Vehicles

#### Standard Design Features:


- Tanks designed and built to meet **CAN/CGSB-43.146-2002 (U.N.) Standard. Permit No. 4-443**
- Flanged heads construction and bottom angles for greater rigidity
- Tank built with A-569, A-1011 or 44W, 3/16" thick steel
- Painted with epoxy primer and polyurethane top coat
- Includes two 2" N.P.T. connections
- Comes with regulation lockable fill/vent cap
- 1" suction line and bronze gate valve
- Two lifting lugs included on every tank
- Labeled as per specifications and regulations
- One additional 2" N.P.T. connection available as option

Inquire about other available options

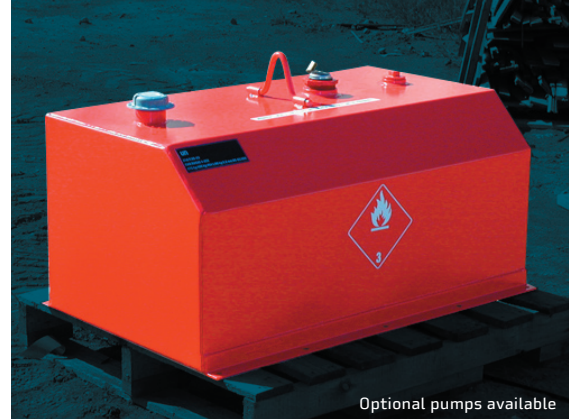

"This high-quality product undergoes a series of tests and is built to last. Proud and dedicated workmanship goes into the fabrication of every tank."

#### Specifications:

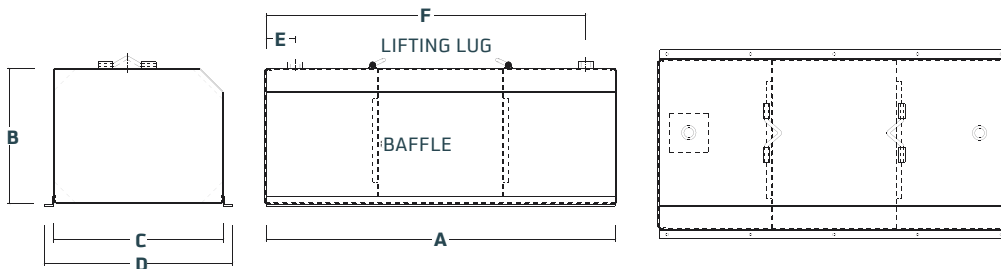

Capacity		Dimensions (in.)						Shell Thickn.	Approx. Weight
Liters	Imp. Gal.	A	B	C	D	E	F		
215	47	41	17	20	24	6	35	3/16"	243 lbs
410	90	53	20.5	24.5	28.5	6	47	3/16"	381 lbs
670	147	60	24.5	29	33	6	54	3/16"	511 lbs
1 120	246	72	28.5	35	39	6	66	3/16"	739 lbs
1 790	394	84	33.5	41	45	6	78	3/16"	992 lbs
2 420	532	96	36	45	49	6	90	3/16"	1 257 lbs

Inquire for details

#### Distributed by: