

MOBILE I.B.C. TANKS

LS Series CAN/CGSB-43.146-2002 Standard

Designed for the Transportation of Petroleum Products

For Road Vehicles

Standard Design Features:

- Tanks designed and built to meet **CAN/CGSB-43.146-2002 Standard. Permit No. 4-452**
- Two piece construction for greater rigidity
- Tank built with A-569, A-1011 or 44W, 1/8" thick steel
- Painted with epoxy primer and polyurethane top coat
- Includes two 2" N.P.T. connections
- Comes with regulation lockable fill/vent cap
- 1" suction line and bronze gate valve
- One lifting lug included on every tank
- Labeled as per specifications and regulations
- One additional 2" N.P.T. connection available as option


Inquire about other available options



Optional pumps available

"This high-quality product undergoes a series of tests and is built to last. Proud and dedicated workmanship goes into the fabrication of every tank."

Specifications:

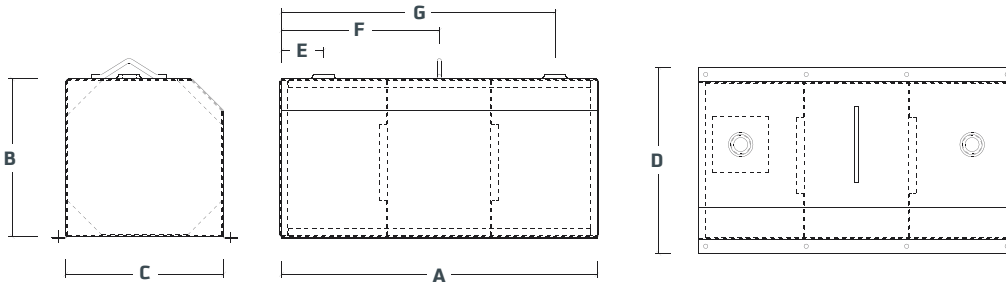

Capacity		Dimensions (in.)							Shell Thickn.	Approx. Weight
Liters	Imp. Gal.	A	B	C	D	E	F	G		
178	39	36	18	18	22	6	18	30	1/8"	159 lbs
356	78	45	22.5	22.5	26.5	6	22.5	39	1/8"	234 lbs
430	95	48	24	24	28	6	24	42	1/8"	265 lbs
534	117	52	26	26	30	6	26	46	1/8"	310 lbs

Inquire for details

Distributed by: